



# SupaSeal PU

## Technical Data Sheet

Dated: 31/03/2014

### Low Modulus Isocyanate Free Polyurethane Sealant

#### PRODUCT DESCRIPTION

**Description:** Admil SupaSeal PU is a Low Modulus, Hybrid Polyurethane, flexible joint sealant and adhesive that is free of Isocyanates and other hazardous raw materials and omits low odour. SupaSeal has been formulated to offer outstanding adhesion to most common building and automotive materials; such as Aluminium, timber, concrete, fibreglass and be used in most sealing and joint filling applications.

SupaSeal displays high joint movement capability with no sagging or slump characteristics to provide a high quality & efficient joint finish.

#### APPLICATIONS

Admil SupaSeal PU is suitable for:

- Construction Joint Sealant applications
- perimeter seals around doors, windows and facades
- general purpose interior joint sealant applications
- sealing and bonding metal roofing systems
- automotive and marine applications requiring a flexible adhesion profile between substrates.

#### FEATURES

- Joint Movement +/- 25%
- Non Slump
- Solvent & Isocyanate Free
- Low Odour & Non Corrosive
- Paintable

#### MATERIALS

- Precast Concrete Panels
- Fibre Cement Sheet
- Block work & Bricks
- Aluminium Profiles
- Sandstone & Granite
- Fibreglass
- Plasterboard & Blue Board

#### SURFACE PREPERATION

Surfaces to be bonded must be clean and dry, as well as free of wax, grease, dust and any other foreign materials so that the adhesive bond is not compromised. Metal substrates should be degreased with Admil Pro Clean Contact Adhesive Cleaner.

#### TYPICAL PROPERTIES

PROPERTY	VALUE	Test Method
Appearance	Thixotropic, Non Sag paste	
Curing Method	Moisture Curing	
Movement Capability	+/- 25%	
Elongation @ Break	Approx. 300%	
Skinning Time	Approx. 35 mins @ 25°C, 50% Relative Humidity	
Tack Free Time	64 minutes	ASTM C 679-87
Rate of Cure	2.5mm per 24 hours	
Full Cure		
Shore A. Hardness	30	ASTM C 661
Specific Gravity	1.6 grams/ml	DIN 52451-A
Tensile Strength	0.7 N/mm <sup>2</sup>	
Service Temperature	-40°C to +90°C	
Application Temperature	+5°C to +50°C	
VOC Rating		

Note: All data provided is based on 25°C and 50% Humidity Conditions & fully cured after 21 days

#### PRIMING

It is advisable to conduct preliminary adhesion tests on substrates where the application is critical or if the adhesion performance is unknown. The use of Admil Prosil Primer 1 is recommended for Non Porous substrates such as metal, aluminium, glass and plastics.


#### APPLICATION INSTRUCTIONS

Cut nozzle at a sharp angle slightly wider than the desired Bead or joint width. If being installed as a joint sealant, always use a suitable backing rod to ensure the correct depth is achieved. The Joint depth should be half of the joint width. Extrude sealant with a gun and tool with a round spatula within 10 minutes to spread the sealant against the joint surfaces.

## SupaSeal PU – Technical Data Sheet

### JOINT DESIGN

- To allow the sealant to move effectively, the correct joint design requires that the sealant depth must be half of the width of the joint.
- A suitable closed cell must be used to ensure that the correct joint depth is achieved.

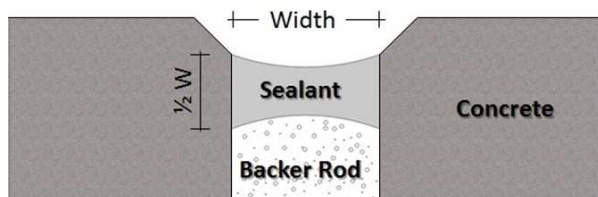

### CURING

Cure speed is dependent upon the temperature, humidity, depth of sealant and substrate. Typically, a joint will form a firm skin in one hour and take up to seven days to fully cure. In cold or very humid climates, the cure time may extend beyond seven days.

### PACKAGING

**SupaSeal PU** is Packaged in Grey, Black & White 600ml Sausages

### SHELF LIFE & STORAGE

9 months shelf when stored in a dry environment and between +5°C and +25°C.

### SAFETY DIRECTIONS

Use in well-ventilated areas, and avoid breathing vapours. In case of eye contact immediately flush with water for 15 minutes and seek medical advice. Avoid contact with skin or clothing.

Keep out of reach of children. In use, please ensure that Occupational Health and Safety requirements are observed.

**Eyes:** Irrigate with water for 10 minutes and see a doctor.

**Skin:** Wash off with warm water and soap.

If swallowed, give plenty of water. Do not induce vomiting. Seek medical attention.

**Admil SupaSeal PU MSDS available upon request**

### Notice

The information given and the recommendations made herein apply to our product(s) alone and not combined with any other product (s). Such are based on our research and on data from other reliable sources and are believed to be accurate. No guarantee of accuracy is made. It is the purchasers' responsibility before using any product to verify this data under their own operating conditions and to determine whether the product is suitable for their purposes.